


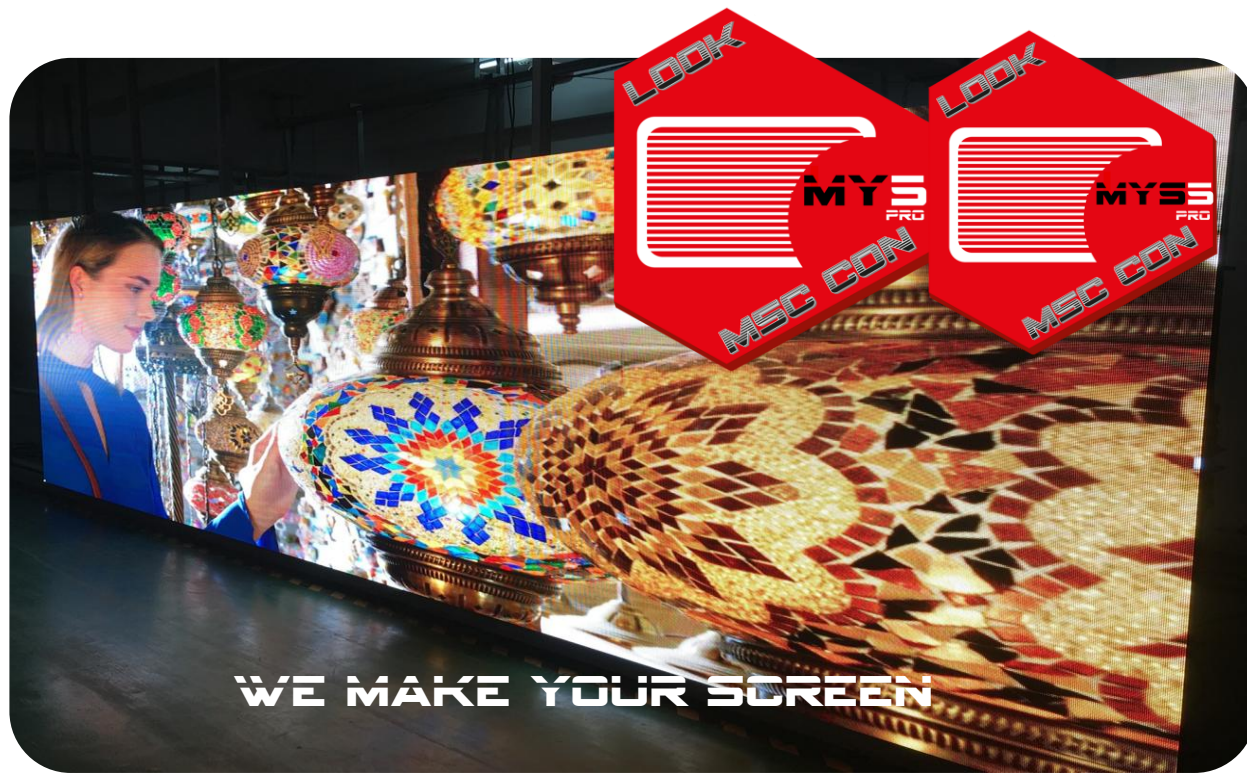

WE MAKE YOUR SCREEN

MSC CON ELECTRONIC

PROFESSIONAL, INNOVATIVE FLEXIBLE INDOOR & OUTDOOR LED PANEL

MYS PRO

MYS PRO

MSC CON Electronic | 2024, 2025, 2026, 2027

Professional LED screen Systemintegrator www.msc-con.eu

MSC CON MYS / MYS PRO

INNOVATIVE TECHNOLOGIE:

Cabinet: 500 x 500mm / 500 x 1000mm



MSC CON MYS / MYS PRO



SOLIDE

EINFACH

SIMPEL

PRÄZISE


SCHNELL



MSC CON MYS / MYS PRO



Optional 90° Module

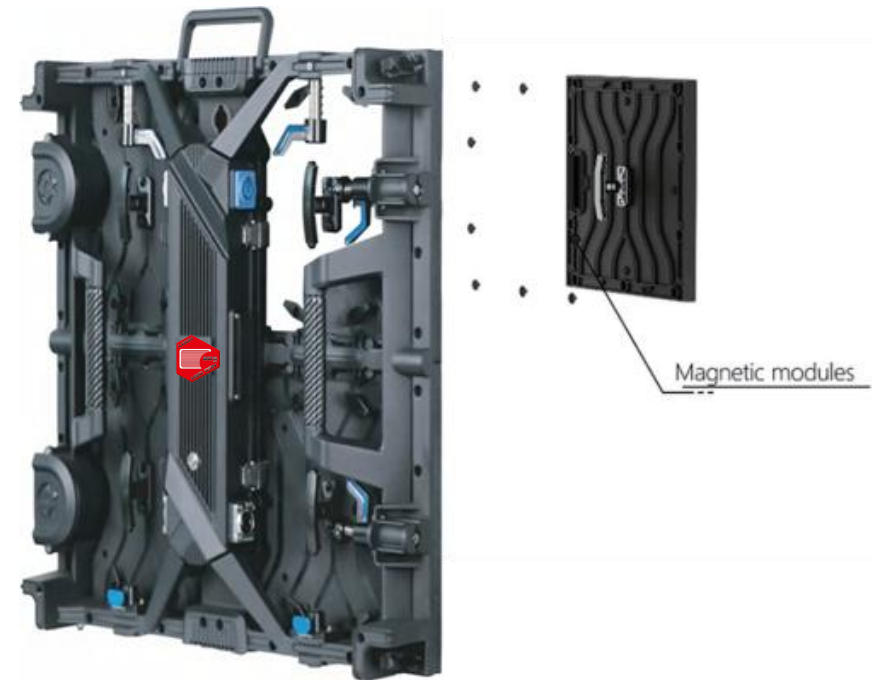

SOLIDE

EINFACH

SIMPEL

PRÄZISE

SCHNELL



MSC CON **MYS** / **MYS PRO**

500X500MM / 500X1000MM



 VERFÜGBARE MODELLE
AVAILABLE MODELS



INDOOR CABINET :





OUTDOOR CABINET :



Alle Modelle sind auch mit Frontservice System bestellbar.
All models can also be ordered with a front service system.

MSC CON MYSS PRO

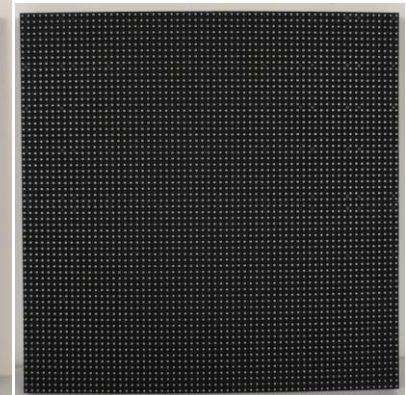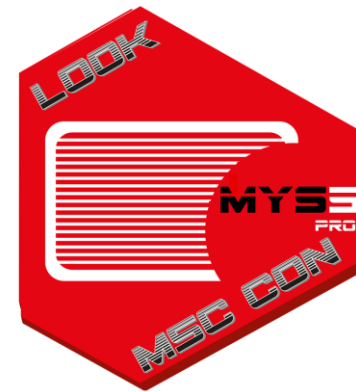

SOLIDE

EINFACH

SIMPEL


PRÄZISE

SCHNELL



MSC CON MYSS PRO

500X500MM

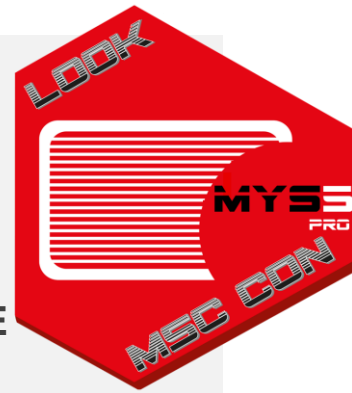

 VERFÜGBARE MODELLE
AVAILABLE MODELS



INDOOR CABINET :




OUTDOOR CABINET :



Alle Modelle sind auch mit Frontservice System bestellbar.
All models can also be ordered with a front service system.

MSC CON MYS / MYS PRO

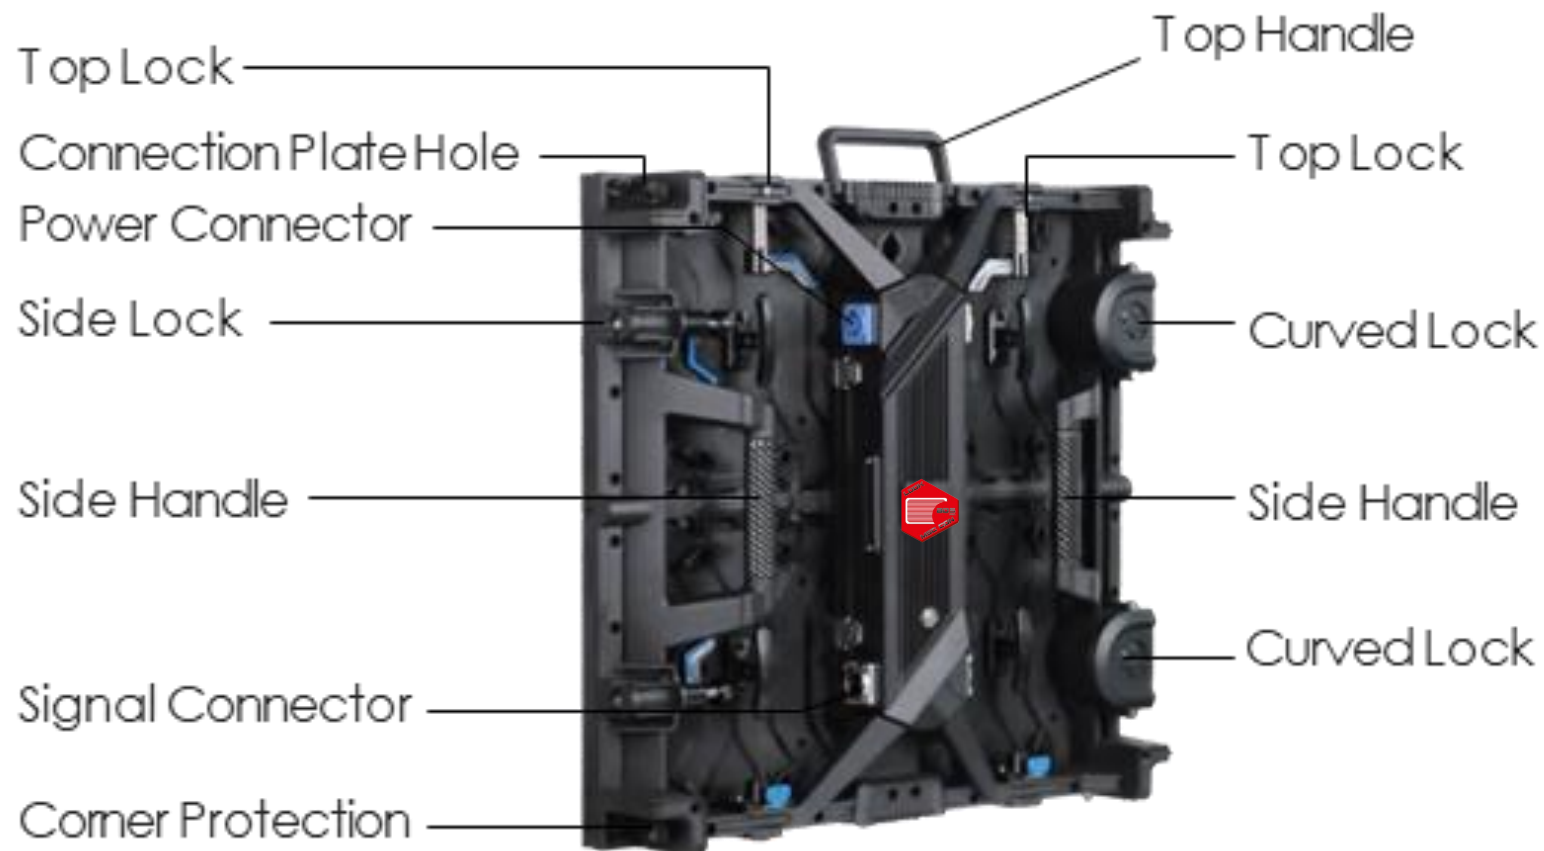

MSC CON MYS / MYS PRO



INSTALLATIONSARTEN:
INSTALLATION TYPES:



Ground Stack Installation




Hanging Installation



MSC CON MYS / MYS PRO



INSTALLATIONSARTEN:
INSTALLATION TYPES:

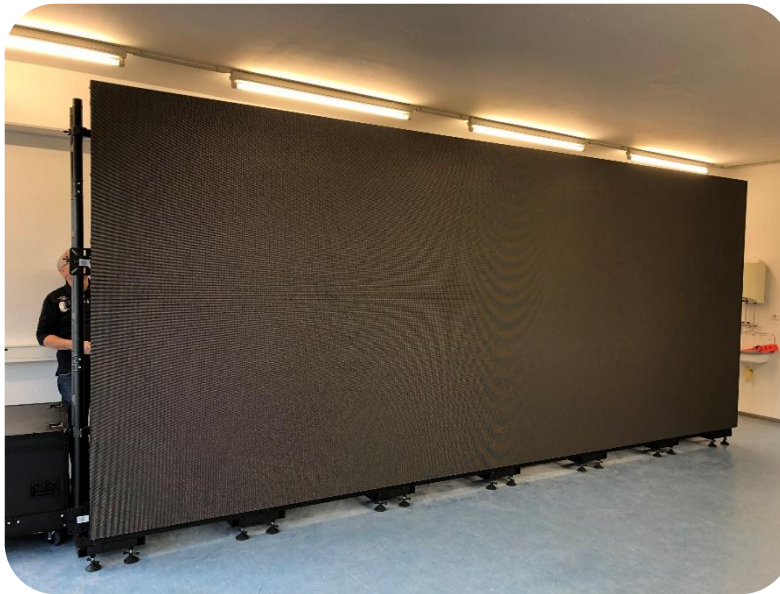

Stacking installation




MSC CON **MYS** / **MYS** PRO



ANWENDUNGSBEREICHE:



EVENTS

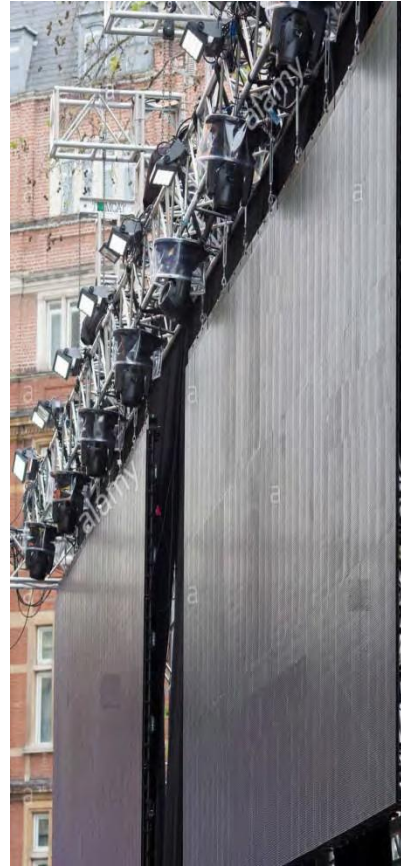

OUTDOOR SHOW



CONFERENCE



ADVERTISING

MSC CON MYS / MYS PRO



TECHNISCHE DATEN: 500 x 500mm

TECHNICAL DATA: 500 x 500mm

Pixel pitch	1,953 mm	2,604 mm	2,976 mm	3,91 mm	4,81 mm
Resolution Cabinet	256 × 256 (HxV)	192 × 192 (HxV)	168 × 168 (HxV)	128 × 128 (HxV)	104 × 104 (HxV)
Brightness Indoor	1400 nits	1900 nits	2500 nits	2500 nits	2500 nits
Brightness Outdoor	3800 nits	4800 nits	5500 - 6000 nits	5500 - 6000 nits	5500 - 6000 nits
Viewing angle	160° / 160° (50% brightness)				
Scan mode	1 / 32	1 / 28	1 / 16	1 / 16	1 / 13
Refresh rate	3840Hz / 4860Hz / (Opt. 7680Hz)				
Processing	8bit/ 10bit/ 12bit/ 14 bits				
Module size	250mm x 250mm x 17mm (W x H x D)				
Panel size	500mm x 1000mm x 90mm (W x H x D)				
Panel weight	6,8kg / 11,5 kg				
Input voltage	AC100~240V 50/60 HZ				
Power consumption (Avg)	370W/sqm	350W/sqm	320W/sqm	300W/sqm	280W/sqm
Power consumption (Max)	740W/sqm	700W/sqm	680W/sqm	640W/sqm	680W/sqm
Working temperature	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C
IP rating	IP54/IP65	IP54/IP65	IP54/IP65	IP65/IP65	IP65/IP65
Life span	100,000 hrs				
Warranty	24 months / 36 months (Opt.)				

**VIELEN DANK FÜR IHRE
AUFMERKSAMKEIT.**

**MANY THANKS FOR
YOUR ATTENTION.**

MY3 PRO

MY3S PRO

**MSC CON ELECTRONIC GMBH
FICHTENWEG 39
99098 ERFURT**

